




1. Place 2 rubber rings in each adapter.

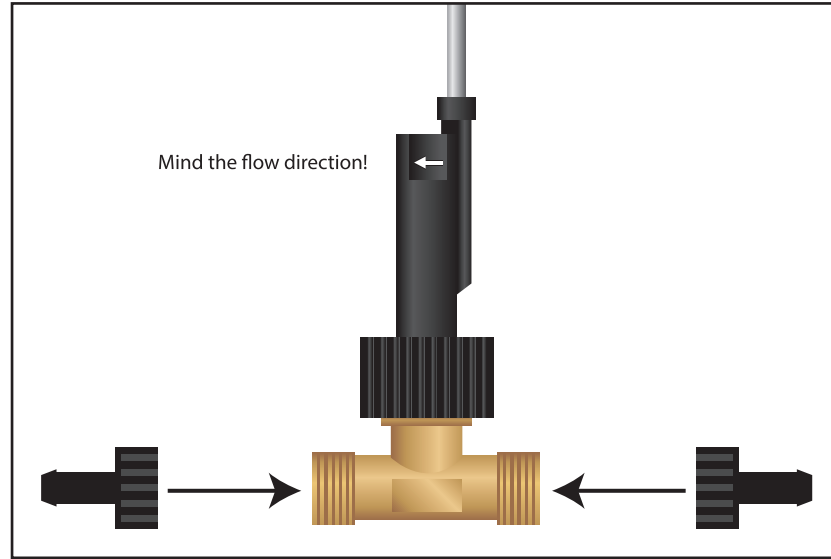


2. Tighten the adapters properly on the in- and outlet of the flow switch.
NOTICE: Be sure it can't leak any water.

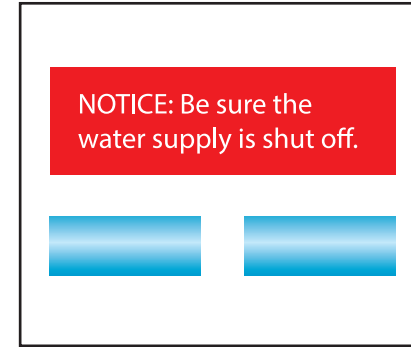


3. Cut the water hose.

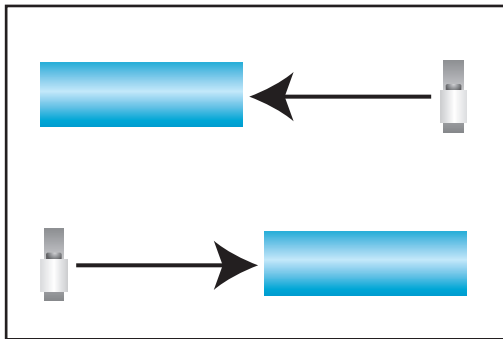

4. Place the hoseclamps on the hose.

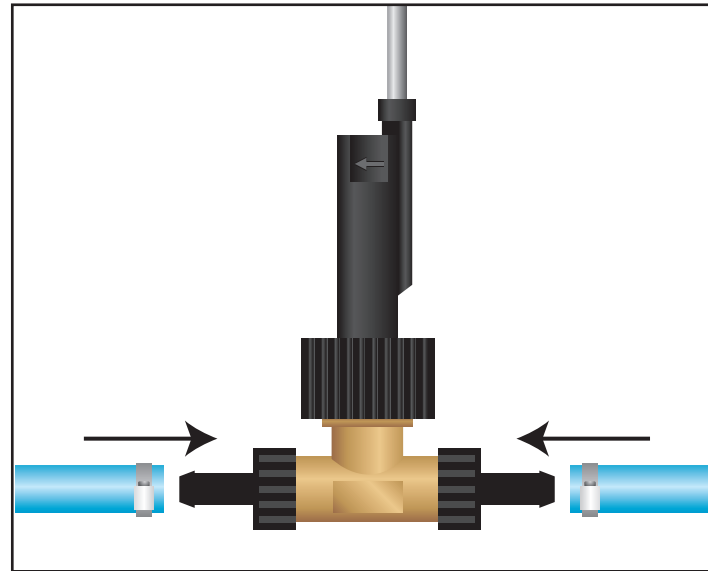

5. Slide the hose over the flow switch.

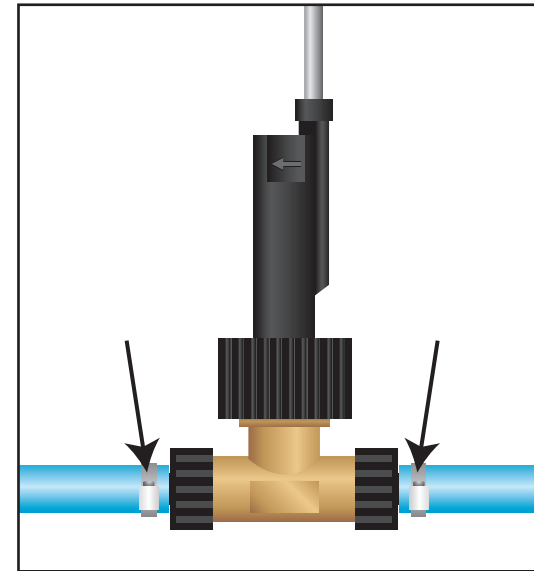

6. Tighten the hose clamps so the hose is secured to the adapters.
NOTICE: Be sure it can't leak any water.

Flow Switch

Please make sure everything is tightened correctly. You can then turn the water supply back on.